



How to send email from your Diode account on a Motorola phone.

On a computer login to your *Gmail* account.


In the upper right hand corner click on the *Gear* icon and then click on *Mail Settings*.

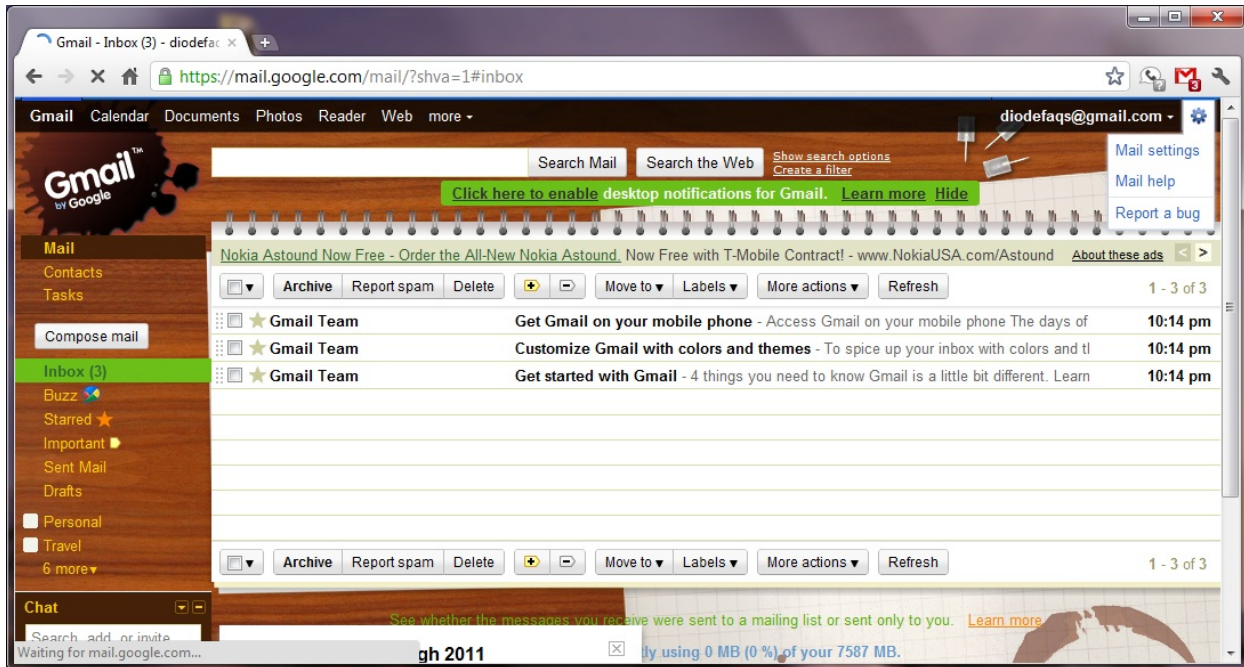

Under *Settings*, find where it says *Accounts and Import* and click on it. Then look for where it says *Check Mail Using POP3* and click on the *Add POP3 Email Account* button.

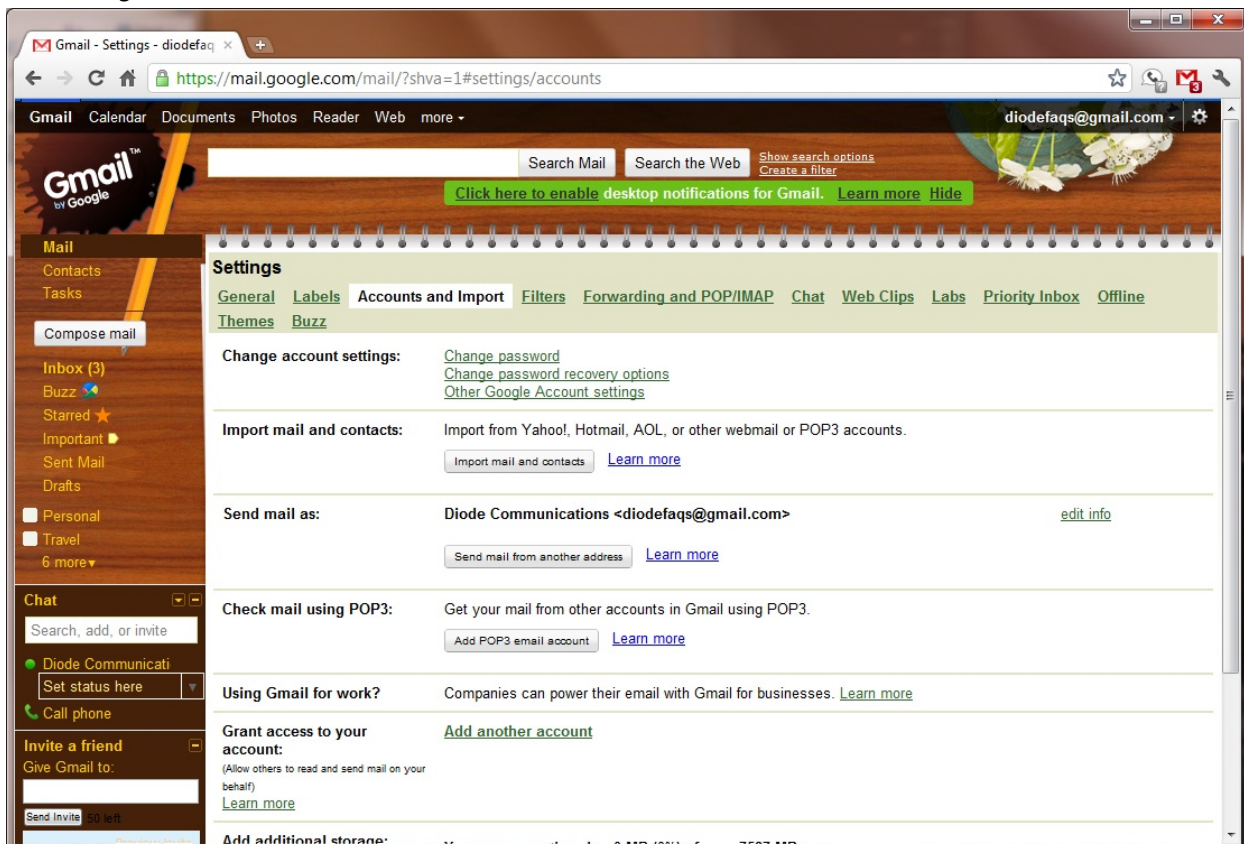

Enter your Diode email address and click *Next Step*.

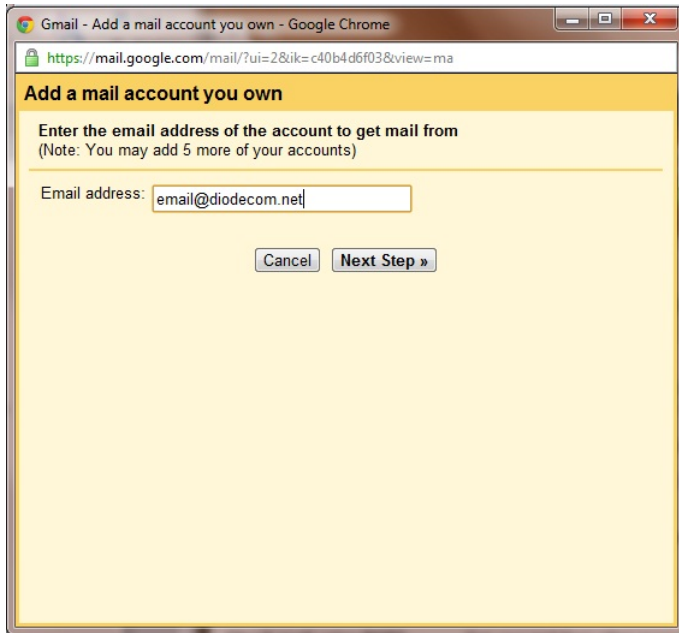

Gmail - Add a mail account you own - Google Chrome


<https://mail.google.com/mail/?ui=2&ik=c40b4d6f03&view=ma>

Add a mail account you own

Enter the email address of the account to get mail from
(Note: You may add 5 more of your accounts)

Email address:

Make sure that your *Username* is correct then type in your *Password*. Then make sure that the *POP Server* is set to mail.diodecom.net and the *Port* is 110. Also be sure to check both *Leave A Copy Of Retrieved Message On Server* and *Label Incoming Messages* and then press the *Add Account* button.

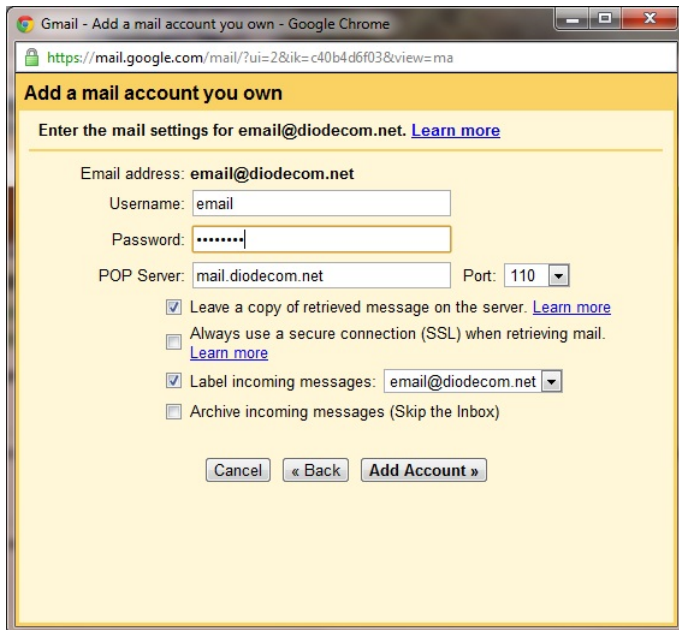

Gmail - Add a mail account you own - Google Chrome

<https://mail.google.com/mail/?ui=2&ik=c40b4d6f03&view=ma>

Add a mail account you own

Enter the mail settings for email@diodecom.net. [Learn more](#)

Email address: **email@diodecom.net**

Username:

Password:

POP Server: Port:


Leave a copy of retrieved message on the server. [Learn more](#)

Always use a secure connection (SSL) when retrieving mail. [Learn more](#)


Label incoming messages:

Archive incoming messages (Skip the Inbox)

Then make sure that *Yes, I Want To Be Able To Send Mail As xxxxxx@diodecom.net* is selected then click *Next Step*.

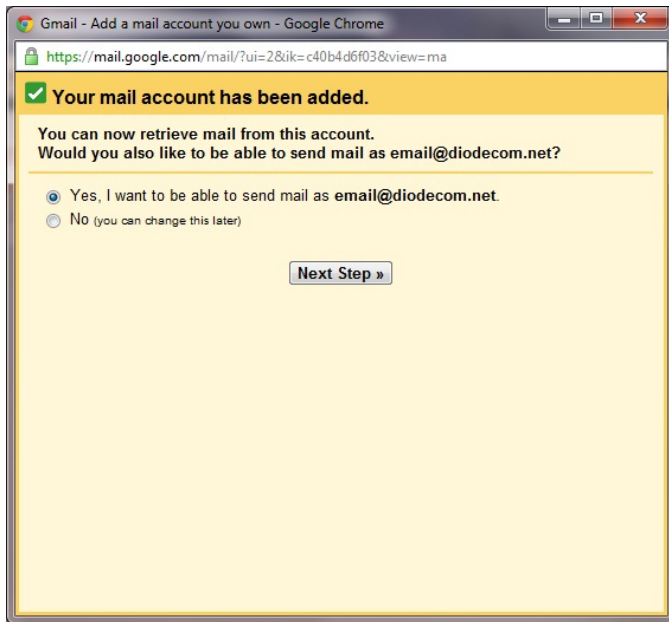


Make sure that your *Name* and *Email Address* are correct and then press *Next Step*.

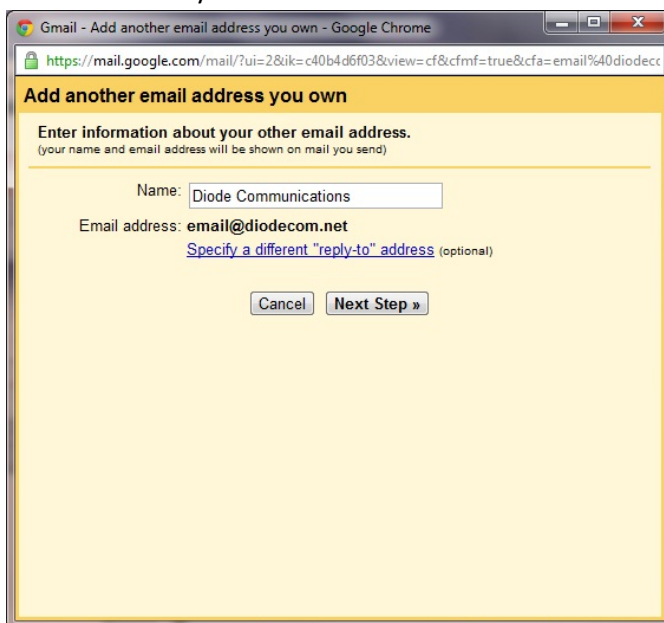


Select *Send Through diodecom.net SMTP servers*. Change the *SMTP Server* to smtp2.diodecom.net and change the *Port* to 25. Make sure your *Username* is correct and then enter your *Password* and then


select *Unsecured Connection* and press *Add Account*.

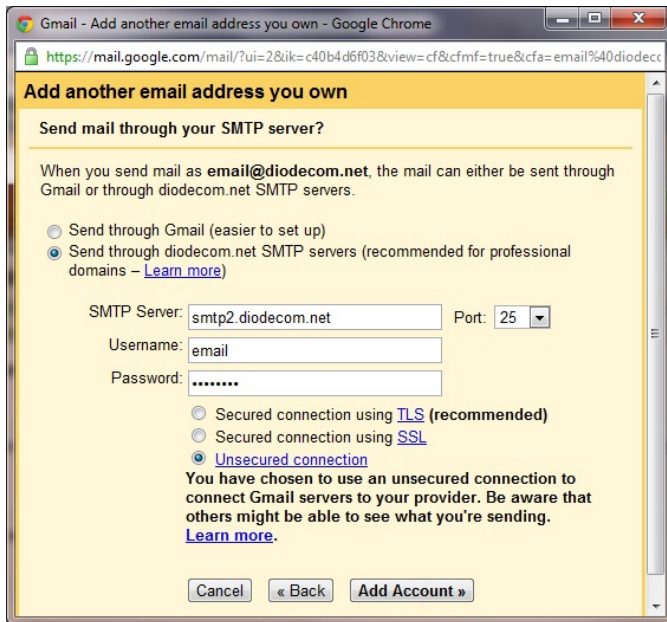

Now *Gmail* will send an email to your Diode email address, go to your Diode account and open that email and look for the *Confirmation Code* (which will be towards the top of the email) and type it into the box and then press *Verify*.


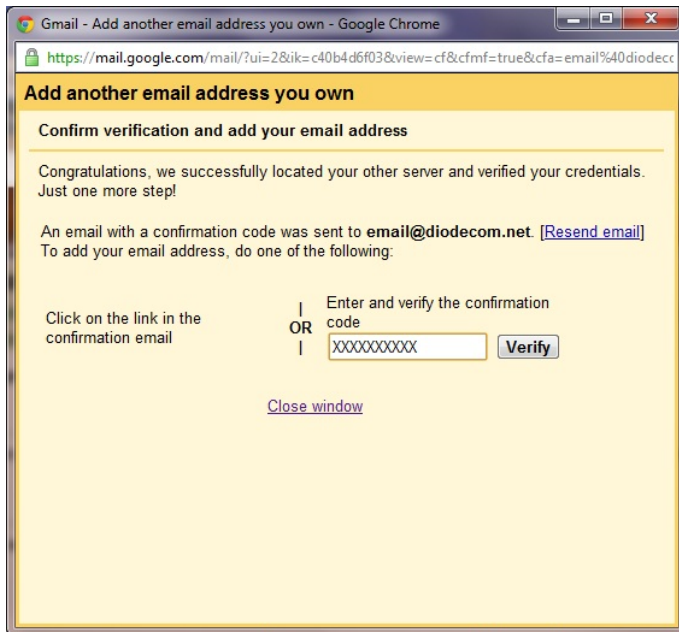


After you press *Verify* you will be taken back to the screen shown below. Then under the *Send Mail As* section, select the option of *Reply From The Same Address The Message Was Sent To*. This option makes it so that when you reply to an email sent to your Diode account, that it will show your Diode email address rather than your Gmail address to the person you send the message to.

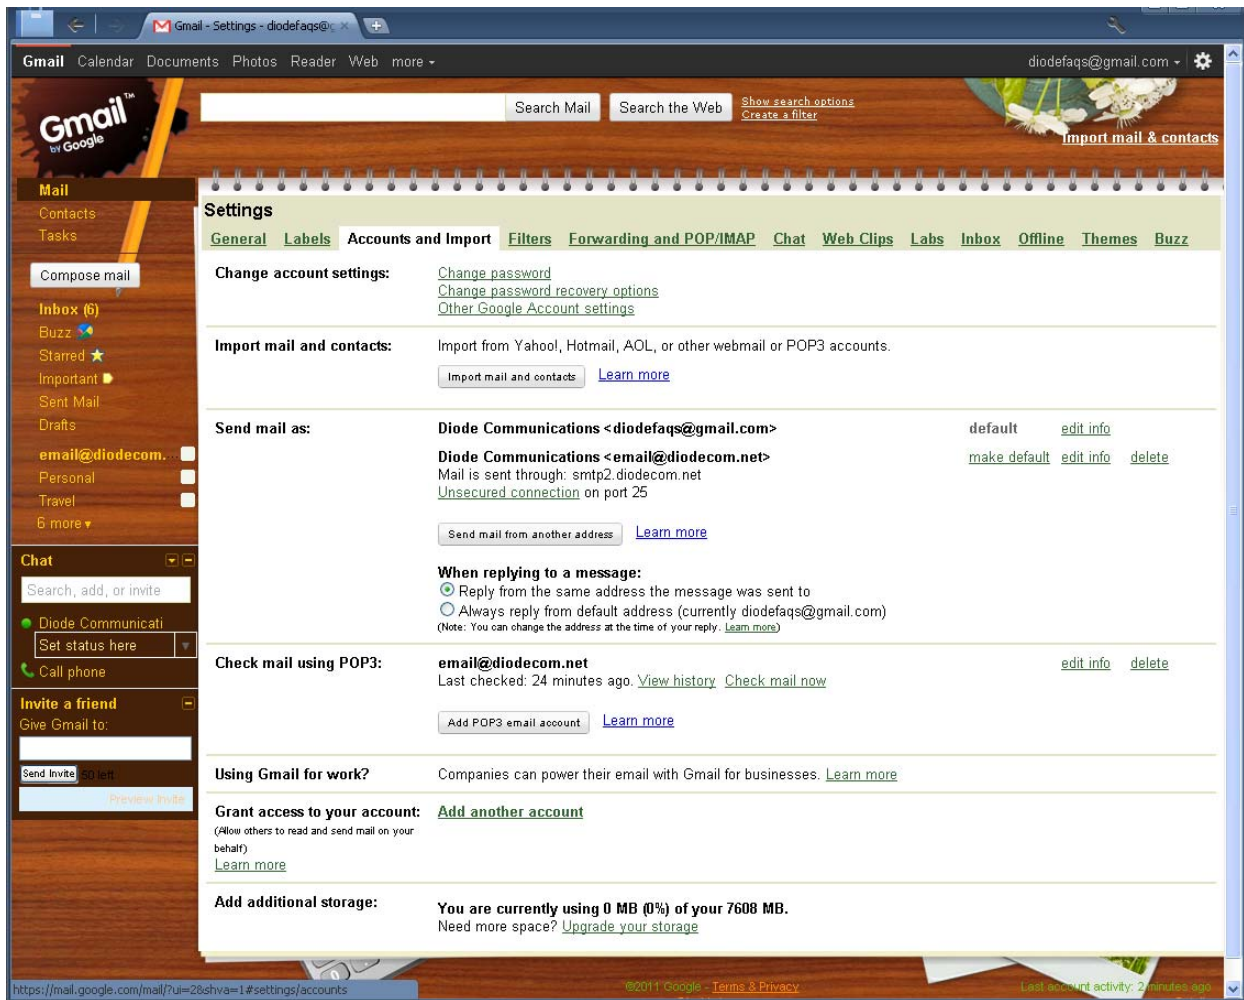

Now on your Motorola phone, open up the *Gmail* application to view both your Gmail messages and your Diode messages. To send a new message from your Diode account, press the *Menu* key on your

phone, then click on the *Compose* button.

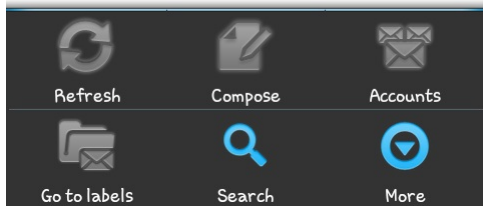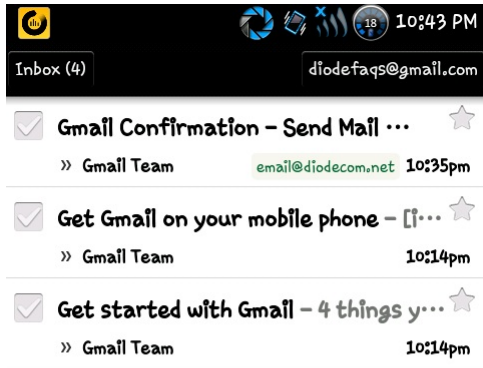

At the top it will now say [XXXXXX@gmail.com](#), if you click on that, it will then list your Gmail account and your Diode account, go ahead and click on your Diode account to send the message from your Diode account.

